

BT Module Version update procedure

0.Download the BT update file.

Unzip the file "BT firmware.zip".

Save the file "FC6000S_01-27-20_64_Bx_xxxSx_PIONEER_44100_SAFEUPDATE.plf" onto the harddrive of the PC.

1. Bluetooth Memory clear *Note: Pairing information needs to be cleared.

<For AVH product>

- Turn the BU & ACC of the product on.
- Turn the product source off.
- Clearing the product memory.

Press home button --> Press "System" Icon of display --> Press "Bluetooth Memory Clear" then press "Clear" then press "OK".

- Press Home button then select BT Audio source.

Confirm display turn "READY" to "NO SERVICE".

<For DEH product>

- Turn the BU & ACC of the product on.
- Turn the product source off.
- Clearing the product memory.

Long press MC button --> Select "Clear memory" then press MC button

--> Displays "Clear memory YES" then press MC button. (Display changes "Clearing" to "Cleared")

- Select BT Audio source using source button.

- Turn ACC off, then turn ACC on again. Confirm display turn "READY" to "NO SERVICE".

2.Open "Bluetooth" on the Laptop PC. Refer to each laptop PC "Bluetooth" feature manual.


The following procedure is for using a BT dongle on Win XP.

Double click "My Bluetooth" icon.



3.Searching the product.

Click "Search for Devices" to search AVH /DEH product.

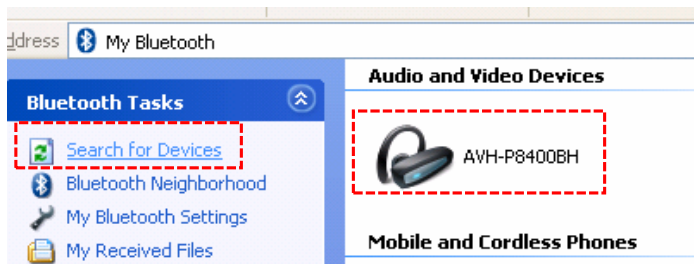

4. Bluetooth Pairing.


Select the product icon and right click the mouse and then click "Secure Pair..."

Next, press OK.




5.Preparing file transfer.

a.Select & double click the AVH/DEH product icon.

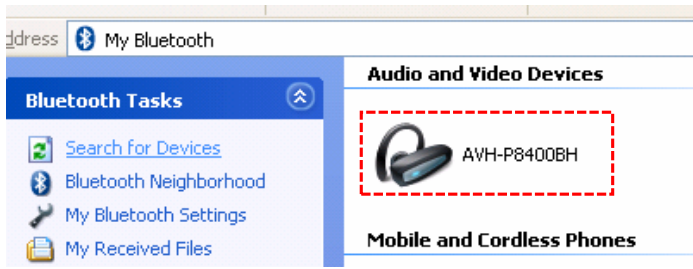

b.If "Send File" item not appear, click "Refresh".

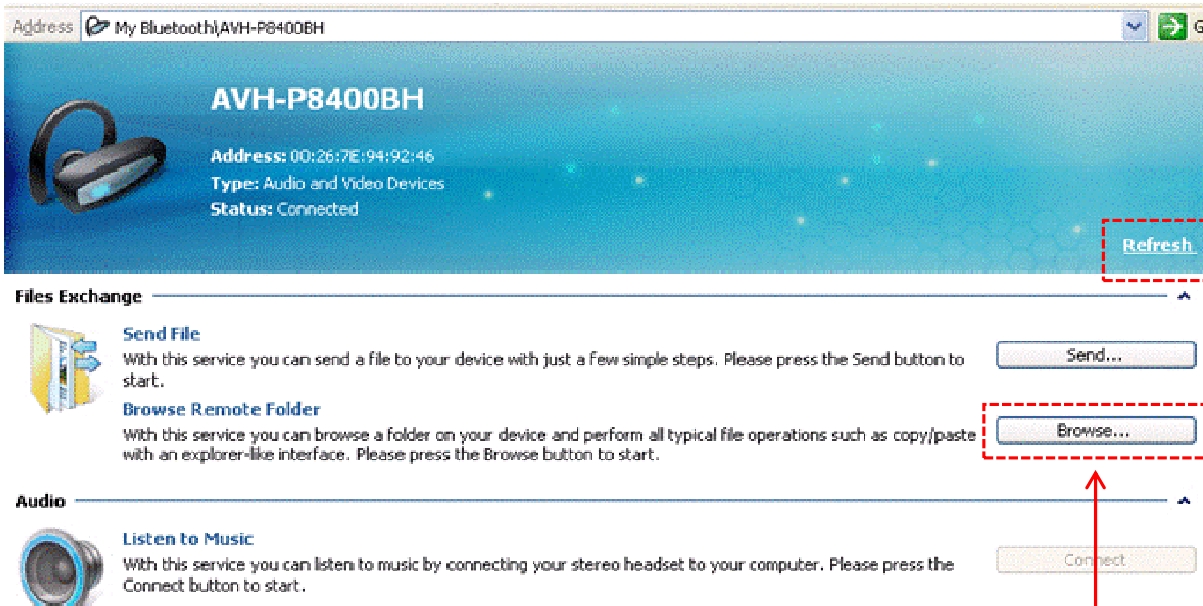

6.Preparing the update of the product.

<For AVH product>


- Turn the source off
- Press HOME button, then touch OSD "System" icon.
- Select "BT Software Update", then press "START" button.

<For DEH product>

- Turn the product source off by long pressing source button.
- Long press MC button --> Select "Software Update" and press MC button.
Confirm display "WAITING" is blinking.


7.Transferring the update file

- Press "Browse..." , then products folder appears.
 - Drag & drop the firmware which saved on desk top to the "update" folder.
- *Note: Could not transfer the file with copy & paste.

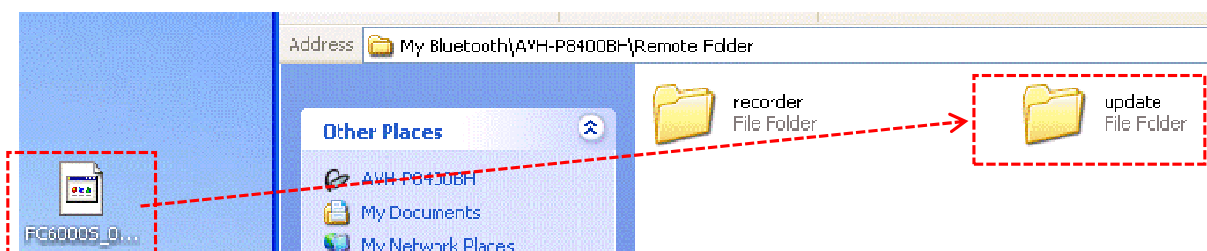

8.Updating

During file transfer, the dialog displays

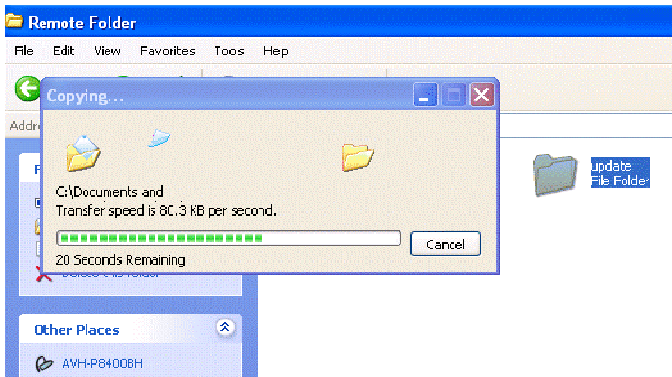

9.Finish Updating

The display of product will appear "Completed".


<AVH>



<DEH>



Please ignore "The request could not be honored" message.

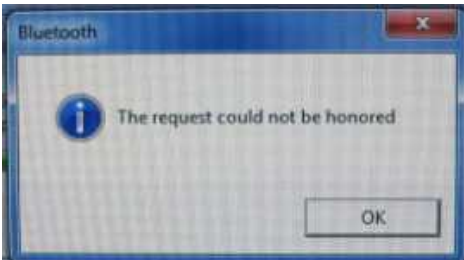

10.Version Confirmation

<For AVH product>

- Turn product ACC off, then On.
- Confirm product is source off.
- Press HOME button, then press "system" Icon of display.
- Press "Bluetooth Version Info".
Confirm the Version is "HW05-SW01.27.20".

<For DEH product>

- Again, turn the product ACC off, then on. Long press MC button to enter the preset MENU again.
- Select "SYSTEM" --> "BT Version Info".
Confirm the Version is "HW05-SW01.27.20".

11.Unexpected problems

If you would encounter a problem at some point during this procedure, then restart from point 1.