


INSTALLATION INSTRUCTIONS

INFODAPTER



The INFODAPTER allows vehicle information such as climate control, parking sensor and heated seats to be displayed on any aftermarket AV head unit. This information would usually be displayed on the original head unit and therefore would not be retained without the use of an INFODAPTER. The infodapter connects to the rear camera input and also maintains steering wheel control functionality.

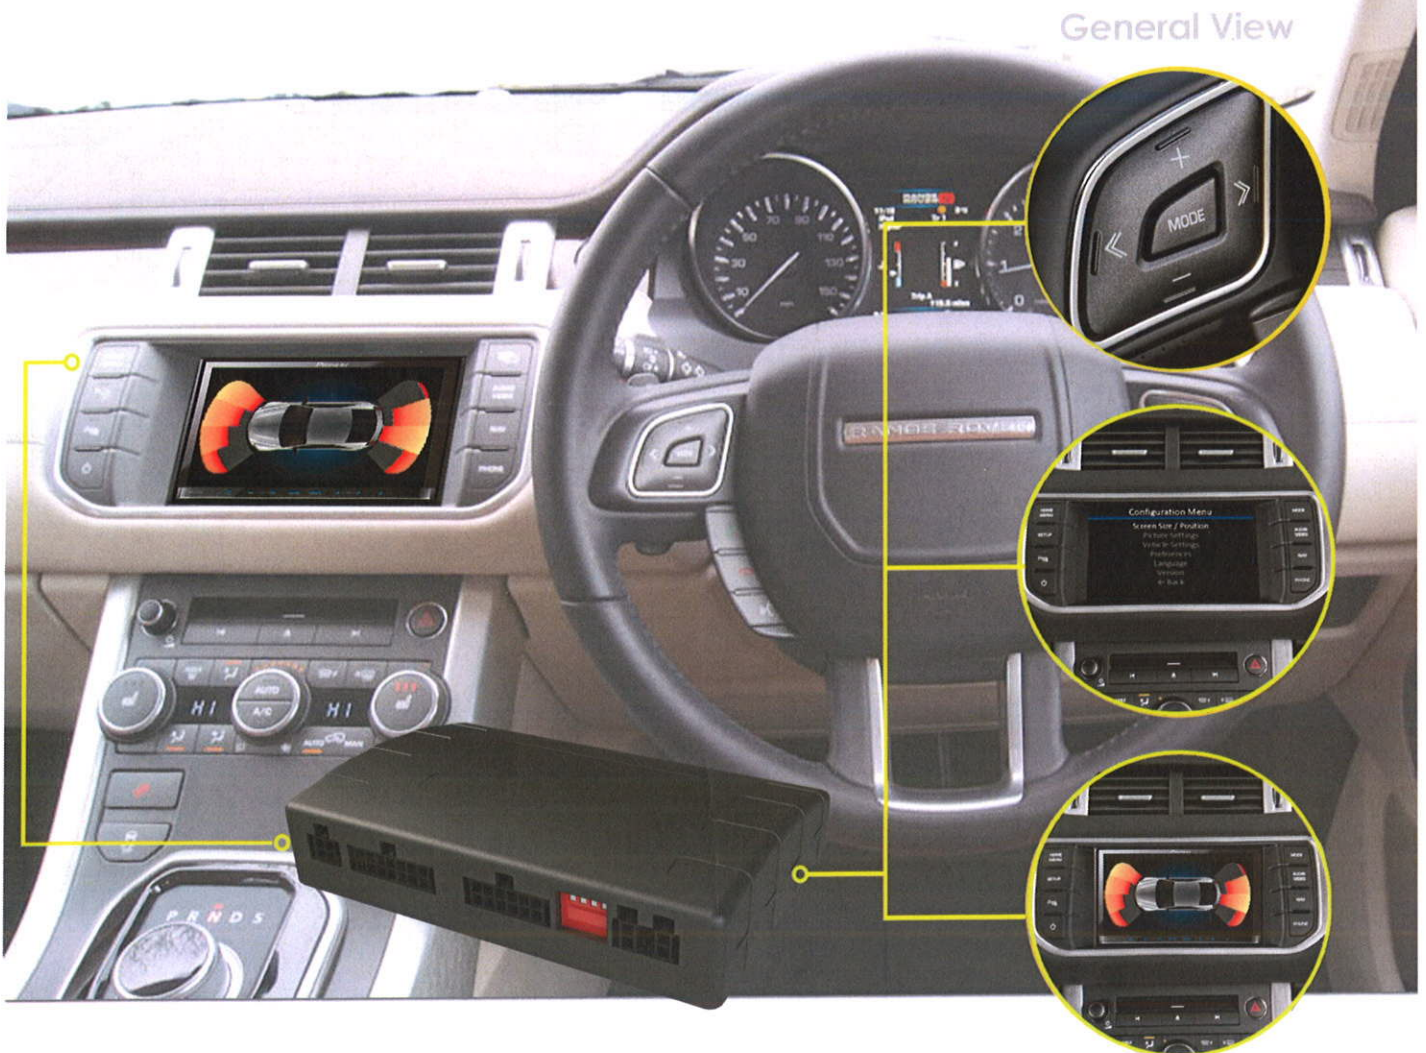


Compatible with any head unit with reverse camera input

- ALPINE
- BLAUPUNKT
- SONY
- clarion
- LG
- KENWOOD
- JVC
- BEAT
- PHILIPS
- Pioneer
- Panasonic
- ZENEC
- BECKER
- CASKA
- BOSS AUDIO SYSTEMS
- FLYAUDIO
- WINCA
- FREEWAY 飞豹
- SKYPINE 美派
- SoundMax
- FORYOU



Diagram

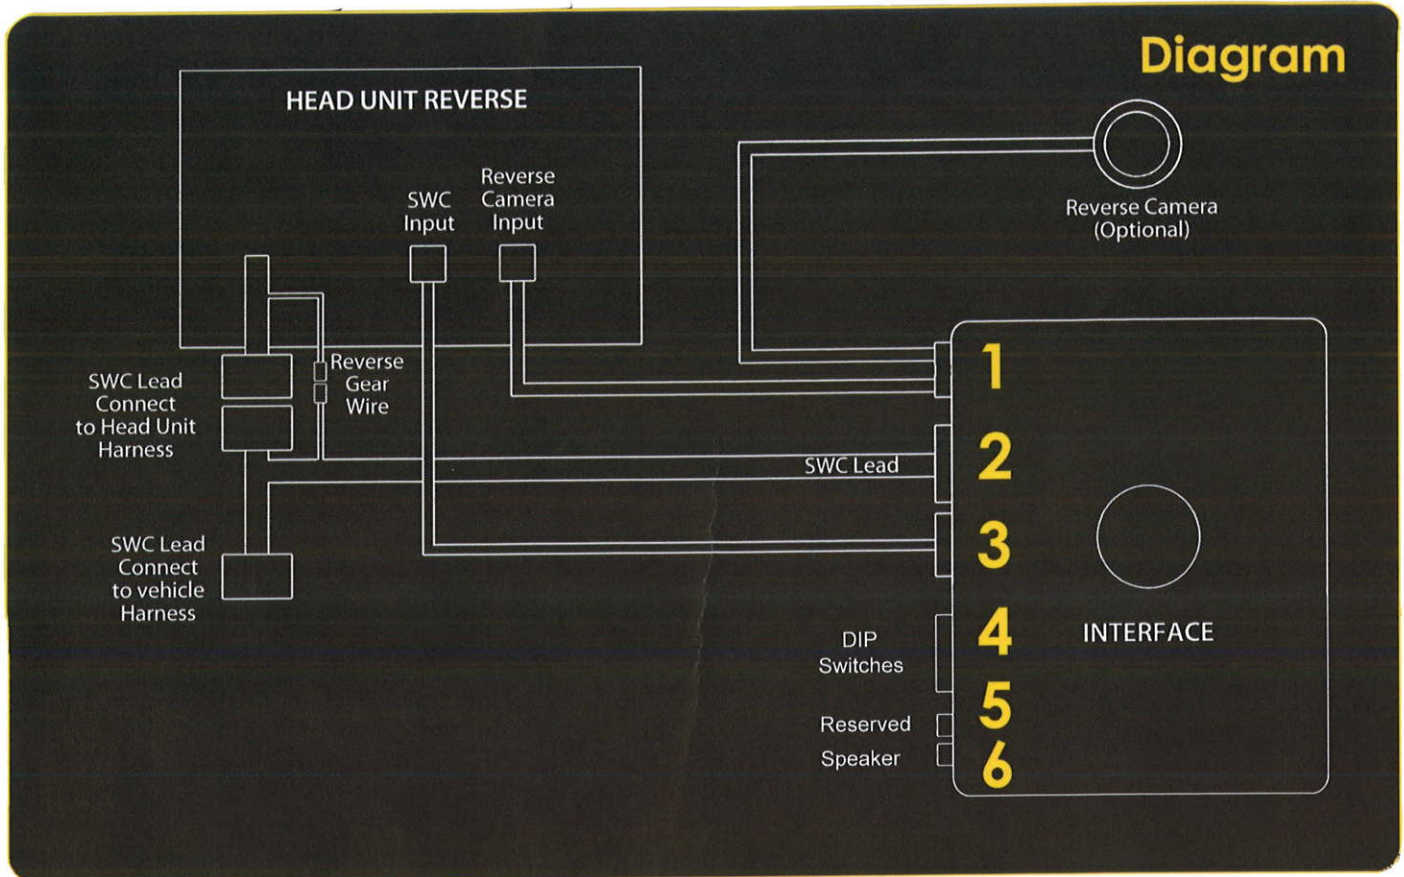

- 1** Reverse camera Input from Head unit, & reverse camera connection from vehicle (optional).
- 2** Main power harness, connecting to the vehicle harness and head unit
- 3** Steering wheel control input.
- 4** **Dip Switch settings - Down = ON, Up = OFF**
 - 1** ON = Pioneer Avic.
OFF = All other units.
 - 2** Setting for Reverse camera ON = PAL, OFF = NTSC.
 - 3** Resets the Display settings back to Factory default.
Selecting the dip switch Position to on, the menu background display will turn red indicating that factory default mode is enabled, please note no adjustment is possible whilst factory default mode is switched on.
 - 4** Not applicable.
- 5** Not Applicable.
- 6** Speaker connection.

INSTALLATION INSTRUCTIONS

Menu User Guide





To Select the Menu, press and hold the Mode button for 2 seconds, this will enable the menu. To select the option press the Mode button once.



To navigate through the menu options use the Track Up / Track down buttons.



screen size and position

Adjust screen size & position, so all 4 corner markers are touching the corners of the aftermarket head unit display.

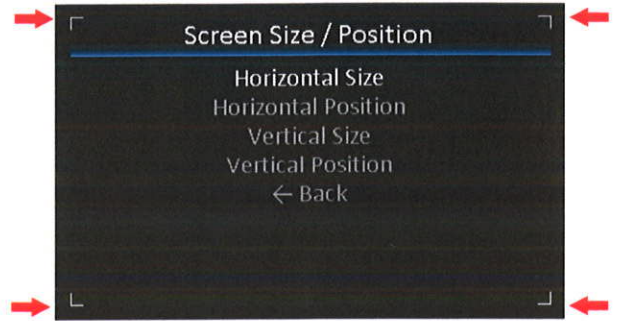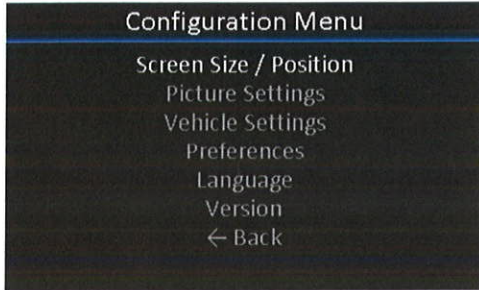

Picture setting





Adjust Brightness/ Contrast/ Saturation

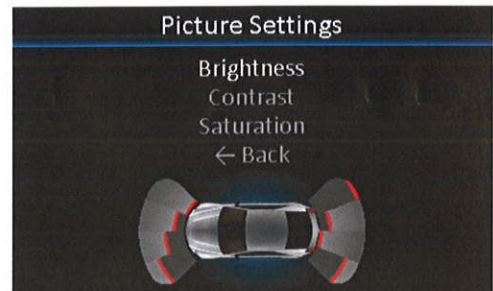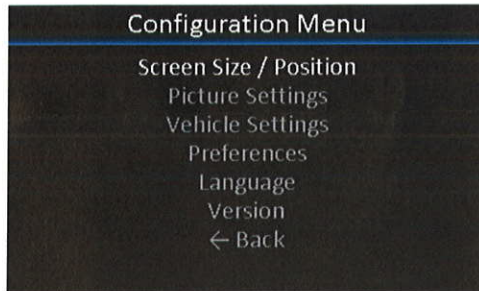






INSTALLATION INSTRUCTIONS

Menu User Guide

Preferences Choose park assist version.

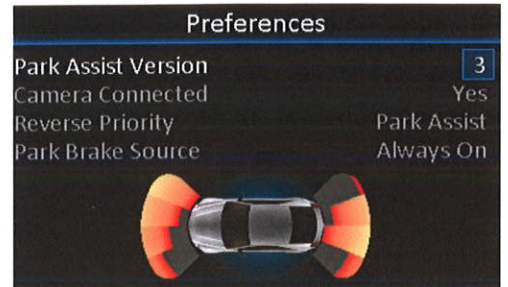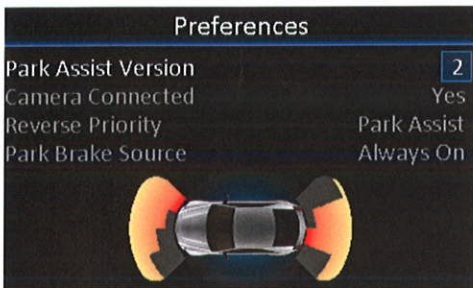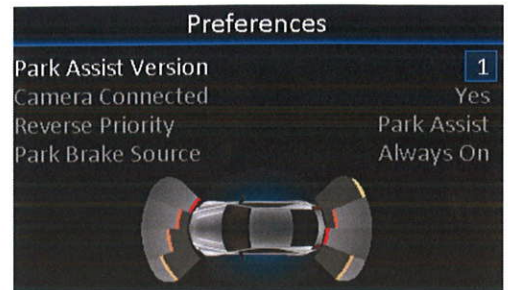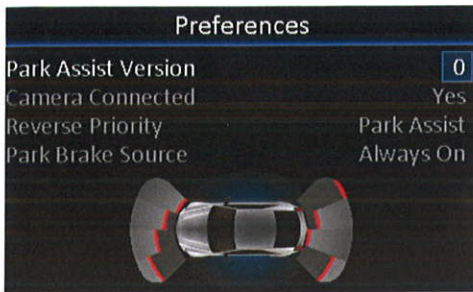

Preferences (Optional) Reverse camera connected, If reverse camera is connected, choose priority when reverse and park assist active at the same time.

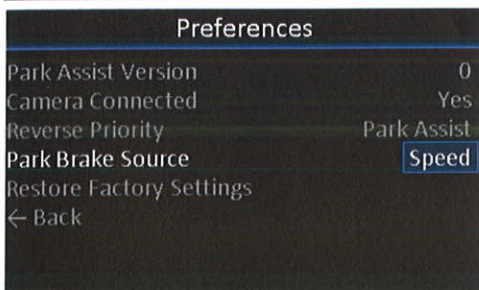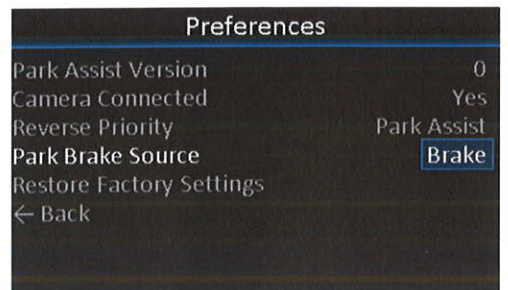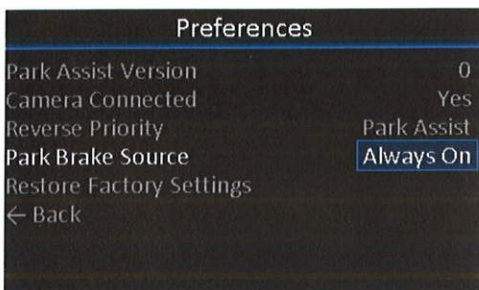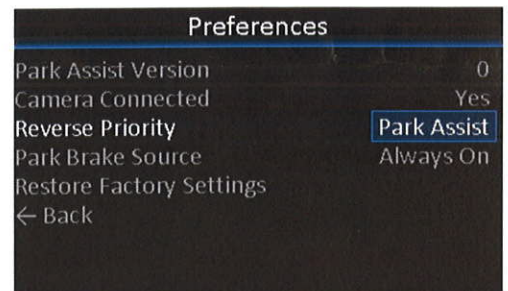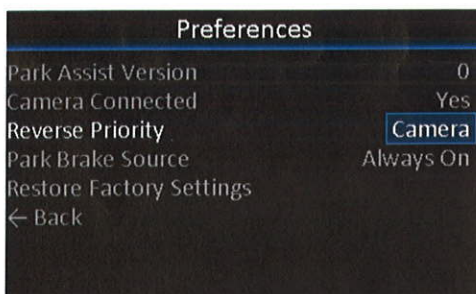

Setting Park Brake Source

- Brake** - Park output will be active when park brake on.
- Speed** - Park output will be active when speed less than 3KMH
- Always on** - Park output will always be active.

Legal Information

By Law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. This product should only be used while standing or to display fixed menus or rear-view-camera video when the vehicle is moving.